

ONEhalf20

Model CT Melt Pressure Transmitter for Extrusion and Polymer Processing

Product Introduction

ONEhalf20 Model CT Melt Pressure Transmitter incorporates a filled capillary design. This tried and proven design provides an electronic signal which is proportional to the measured pressure, and allows the transmitter to operate at a process temperature up to 750°F. The electronics of each transmitter is a Wheatstone Bridge - bonded strain gauge design insuring high accuracy, reliability and repeatability.

The Model CT Melt Pressure Transmitter has a 6" rigid stem along with 18" of flex capillary for optimum thermal isolation. The ModelCT is the mostcommon melt pressure transmitter style.

General Specifications

Mechanical

Pressure Ranges: 0-500 psi to 0-15,000 psi
metric ranges available

Mounting: 1/2-20 UNF thread
Mounting Torque: 500 inch pounds maximum

Diaphragm: 15-5PH stainless steel

Overload Capacity: 2 times FSO

Temperatures: diaphragm 750°F
electronics 225°F

Accuracy: 0.5% FSO

Repeatability: better than 0.15% FSO

Zero Balance: +/- 10% FSO

Electrical

Type: bonded strain gauge,
4 leg Wheatstone Bridge

Bridge Resistance: 350 Ohm +/- 5%

Connector: 6 pin Bendix style bayonet

Output: 4-20 mA or 0-10 Vdc

Excitation Voltage: 24 Vdc - recommended

Calibration: internal 80% FSO

Insulation: 1,000 Megohms at 50 Vdc

Features

- zero & span adjustment pots for precise output
- internal 80% shunt calibration
- direct replacement for competitor's models utilizing the Bendix 6 pin bayonet style connector
- all welded all stainless steel sealed construction
- two accuracy grades available 0.5% standard accuracy, or 0.25% optional

Model CT



Model CT with Type J Thermocouple Option



Benefits

- significant price/performance advantage over competitor's models
- reliable, repeatable and accurate pressure measurements
- ease of calibration and installation
- wide variety of pressure ranges
- two year warranty



Model CT



Melt Pressure Transmitter

for Extrusion and Polymer Processing

Ordering Guide



<u>Model Number</u>	<u>Transmitter Style</u>		
CT	rigid stem with 18" flex capillary		
<u>Accuracy</u>			
"no designation"	0.5% Accuracy - standard		
DLX	0.25% Accuracy		
<u>Rigid Stem Length</u>			
3	3"		
6	6" - standard		
12	12"		
<u>Output</u>			
MA	4-20 mA		
V	0-10 Vdc		
<u>Standard Pressure Ranges</u>			
-5C	0 - 500 psi	-35B	0 - 35 bar
-1M	0 - 1,000 psi	-70B	0 - 70 bar
-1.5M	0 - 1,500 psi	-1CB	0 - 100 bar
-3M	0 - 3,000 psi	-2CB	0 - 200 bar
-5M	0 - 5,000 psi	-3.5CB	0 - 350 bar
-7.5M	0 - 7,500 psi	-5CB	0 - 500 bar
-10M	0 - 10,000 psi	-7CB	0 - 700 bar
-15M	0 - 15,000 psi	-1MB	0 - 1,000 bar
<u>Common Options</u>			
-8PIN	8 pin connector in place of standard 6 pin		
-TCJ	Thermocouple Type "J"		
-TCK	Thermocouple Type "K"		
-PT100	100 Ohm Platinum RTD		
-M18	M18 X 1.5 metric thread in place of 1/2-20 UNF		
-FAxx	Non-Standard flex armour length (xx specify in inches)		
For configurations not listed please contact your local ONEhalf20 distributor.			

North America Toll Free 877 781-1881
Other Locations 416 781-1881
www.onehalf20.com

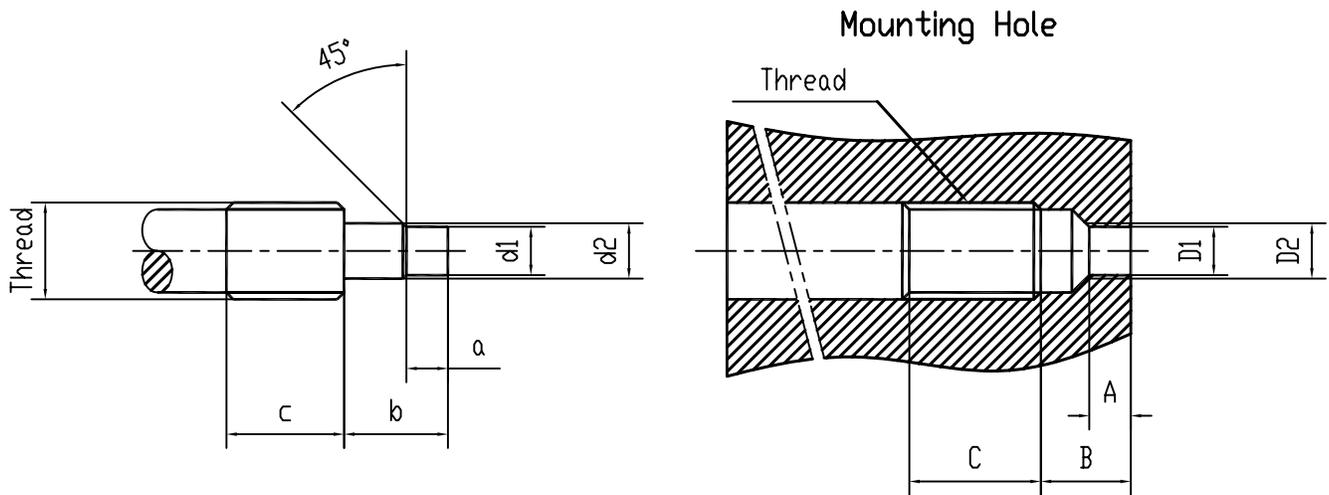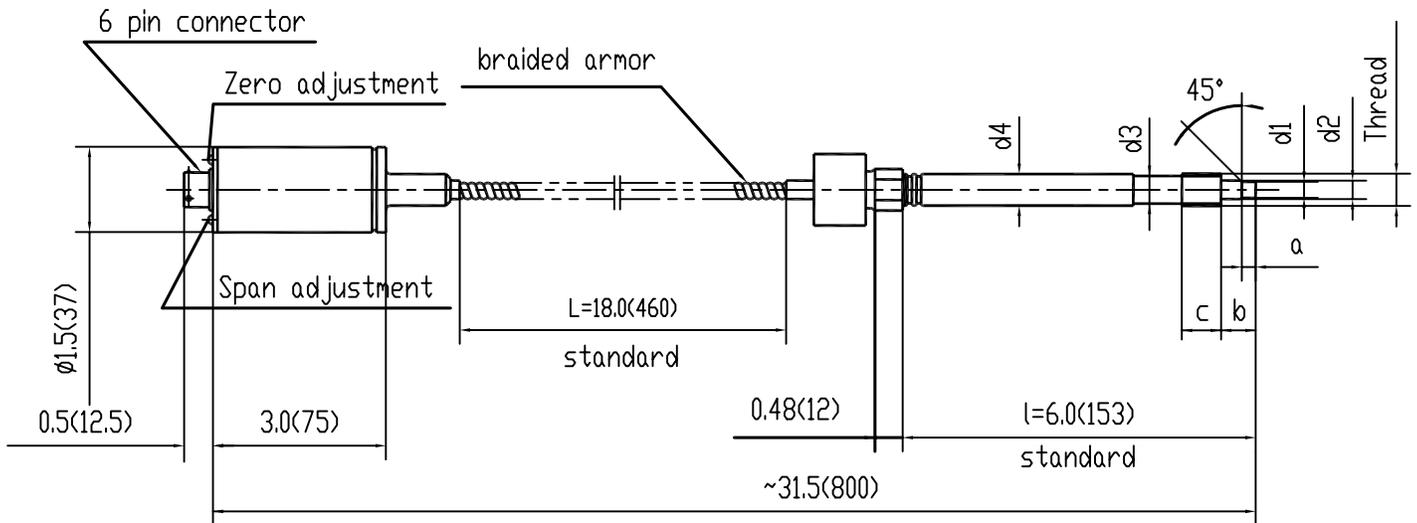


Thread	d1	d2	a	b	c	d3	d4
1/2"-20	ø0.307(7.8) ø0.303(7.7)	ø0.413(10.5) ø0.407(10.35)	0.217(5.5) 0.211(5.35)	0.441(11.2) 0.433(11.0)	0.629(16)	ø0.41(10.5)	ø0.5(12.7)
M14x1.5	ø0.307(7.8) ø0.303(7.7)	ø0.465(11.8) ø0.457(11.6)	0.217(5.5) 0.211(5.35)	0.441(11.2) 0.433(11.0)	0.708(18)	ø0.47(12.0)	ø0.54(13.7)
M18x1.5	ø0.394(10.0) ø0.386(9.8)	ø0.610(15.5) ø0.602(15.3)	0.236(6.0) 0.230(5.85)	0.551(14.0) 0.543(13.8)	0.787(20)	ø0.63(16.0)	ø0.669(17.0)

Thread	D1	D2	A	B	C
1/2"-20	ø0.314(7.98) ø0.312(7.92)	ø0.458(11.65) ø0.452(11.47)	0.225(5.72)	0.395(10.02)	0.75(19)
M14x1.5	ø0.314(7.98) ø0.312(7.92)	ø0.512(13.0) ø0.504(12.8)	0.225(5.72)	0.395(10.02)	0.827(21)
M18x1.5	ø0.401(10.19) ø0.399(10.13)	ø0.638(16.2) ø0.634(16.1)	0.242(6.15)	0.402(10.15)	1.00(25.4)

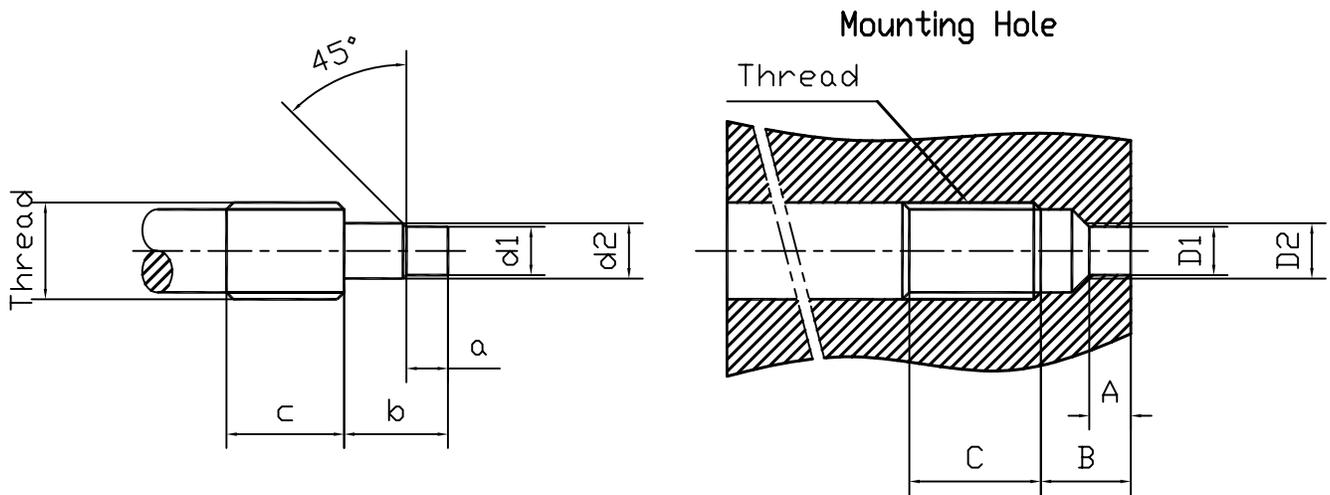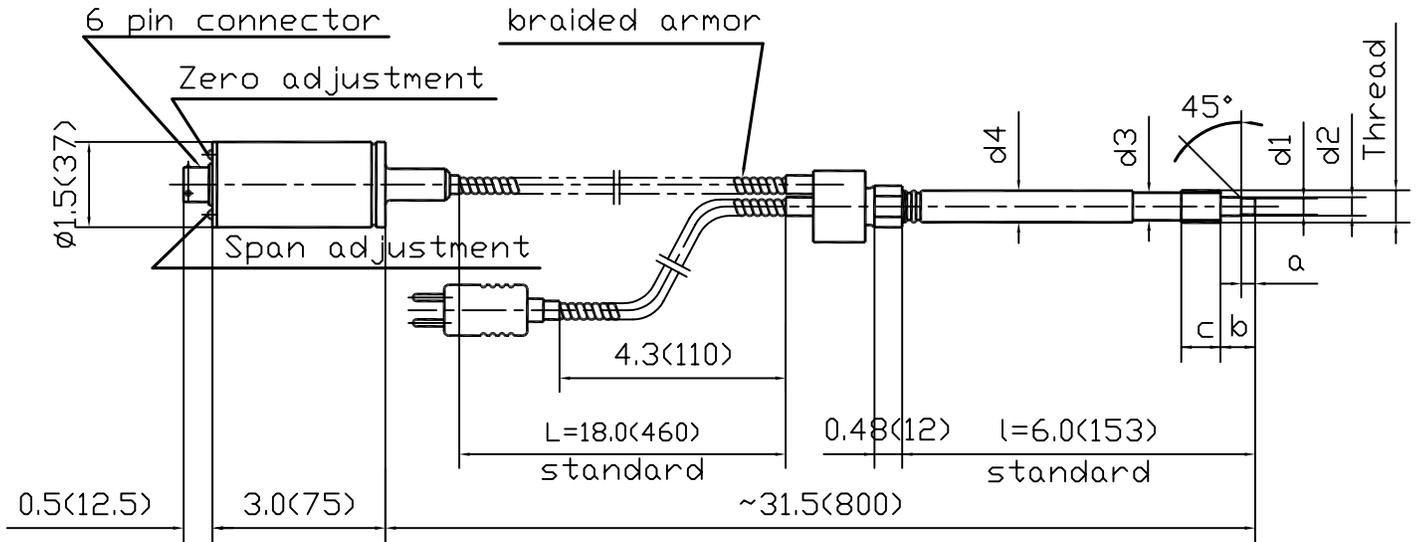

Thread	d1	d2	a	b	c	d3	d4
1/2"-20	ø0.307(7.8) ø0.303(7.7)	ø0.413(10.5) ø0.407(10.35)	0.217(5.5) 0.211(5.35)	0.441(11.2) 0.433(11.0)	0.629(16)	ø0.41(10.5)	ø0.5(12.7)
M14x1.5	ø0.307(7.8) ø0.303(7.7)	ø0.465(11.8) ø0.457(11.6)	0.217(5.5) 0.211(5.35)	0.441(11.2) 0.433(11.0)	0.708(18)	ø0.47(12.0)	ø0.54(13.7)
M18x1.5	ø0.394(10.0) ø0.386(9.8)	ø0.610(15.5) ø0.602(15.3)	0.236(6.0) 0.230(5.85)	0.551(14.0) 0.543(13.8)	0.787(20)	ø0.63(16.0)	ø0.669(17.0)

Thread	D1	D2	A	B	C
1/2"-20	ø0.314(7.98) ø0.312(7.92)	ø0.458(11.65) ø0.452(11.47)	0.225(5.72)	0.395(10.02)	0.75(19)
M14x1.5	ø0.314(7.98) ø0.312(7.92)	ø0.512(13.0) ø0.504(12.8)	0.225(5.72)	0.395(10.02)	0.827(21)
M18x1.5	ø0.401(10.19) ø0.399(10.13)	ø0.638(16.2) ø0.634(16.1)	0.242(6.15)	0.402(10.15)	1.00(25.4)

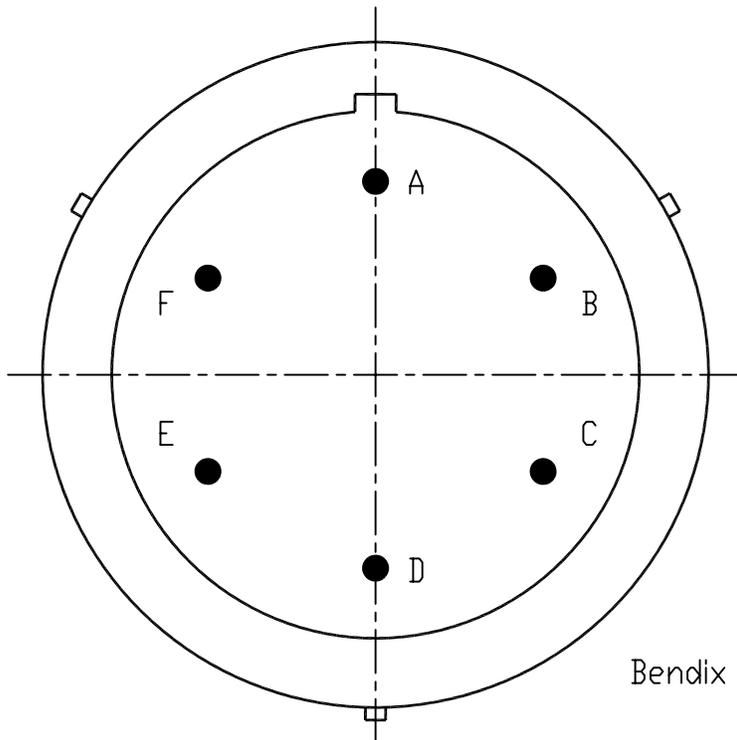

Bendix PT02-10-6P or Equivalent

	mA Output (Excitation-24Vdc)	Volt Output (Excitation-24Vdc)
Pin A/Red	Input/Signal(+)	Signal(+)
Pin B/Black	Input/Signal(-)	Signal(-)
Pin C/White	No Connection	Excitation(+)
Pin D/Green	No Connection	Excitation(-)
Pin E/Blue	Calibration 1	Calibration 1
Pin F/Orange	Calibration 2	Calibration 2