

Product Introduction

ONEhalf20 Melt Pressure Gauges with transmitter outputs are designed for processors who would benefit from localized pressure indication at the extruder barrel. These gauges also offer the advantage of providing either 4-20mA or 0-10 Vdc output. The electronics of each transmitter are a Wheatstone Bridge - bonded strain gauge design insuring high accuracy, reliability and repeatability.

The CTG style follows the classic melt pressure transmitter design. It comprises a 6" rigid stem, along with 30" of flexible capillary, for optimal thermal isolation. The RTG style has only a 6" rigid stem.

Features

- localized analogue visual pressure indication
- fully compatible with all competitor melt pressure transducers utilizing the Bendix 6 pin bayonet style connector
- 4-20mA or 0-10 Vdc output utilizing the industry standard 6 pin Bendix style bayonet connector
- dual scale bar and psi
- all stainless steel construction with large 4" dial face with safety glass for ease of viewing

General Specifications

Mechanical & Electrical

Pressure Ranges:	0-5,000 psi to 0-10,000 psi dual scale
Mounting:	1/2-20 UNF thread
Mounting Torque:	500 inch pounds maximum
Diaphragm:	15-5PH stainless steel
Overload Capacity:	2 times FSO
Temperatures:	diaphragm 750°F electronics 225°F
Accuracy:	electronics 1% FSO indication 2% FSO
Excitation Voltage:	24 Vdc
Calibration:	internal 80% FSO
Zero Adjust:	10% of full scale
Needle Sweep:	270°
Dial:	4" with safety glass



CTG Style



RTG Style

Options

Temperature Output:	Type J thermocouple Type K thermocouple
Mounting:	M18 X 1.5
Rigid Stem Length:	12" available
Configuration:	Stem-up design RTG series only

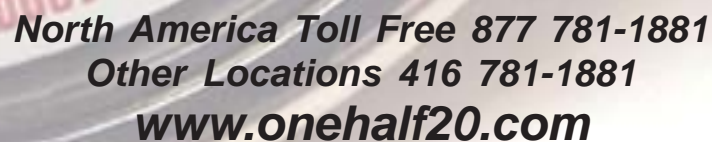
The logo for ONEhalf20, featuring the text "ONEhalf20" in a stylized, bold font with a jagged, gear-like border.

Melt Pressure Gauges

with transmitter outputs

Ordering Guide

<u>Model Number</u> CTG RTG	<u>Gauge Style</u> rigid stem with 30" flex armor rigid stem only (no flex armor)
6 12	<u>Rigid Stem Length</u> 6" - standard 12"
MA V	<u>Output</u> 4-20 mA 0 -10 Vdc
-5M -10M	<u>Standard Pressure Ranges</u> 0 - 5,000 psi and 0 - 350 bar (dual scale) 0 - 10,000 psi and 0 -700 bar (dual scale)
-TCJ -TCK -SU -M18 -FAxx	<u>Common Options</u> Thermocouple Type "J" Thermocouple Type "K" Stem-up configuration (RTG series only) M18 X 1.5 metric thread in place of 1/2-20 UNF Non-Standard flex armor length (xx - specify in inches)
For configurations not listed please contact your local ONEhalf20 distributor.	

The contact information for ONEhalf20, including the toll-free number for North America, other location numbers, and the website address. The background shows a close-up of a pressure gauge dial with the number "2000" visible.

North America Toll Free 877 781-1881
Other Locations 416 781-1881
www.onehalf20.com