



Price* : 49.70 USD



Main

Range of product	Zelio Relay
Product or component type	Solid state relay
Device short name	SSM
Number of channels	2
Phase	2 phases

Complementary

Mounting support	Symmetrical DIN rail
Line Rated Current	6 A
Output voltage	48...600 V AC
[Uc] control circuit voltage	4...32 V DC
Contacts type and composition	2 NO
Tightening torque	Input : 0.5...0.8 N.m Output : 0.5...0.8 N.m
Connections - terminals	Screw terminals : 1 x 0.3...1 x 1.5 mm ² , (AWG 22...AWG 16) input Screw terminals : 1 x 0.3...1 x 2.5 mm ² , (AWG 22...AWG 14) output
Capacitance unbalance	<= 10 pF input/output
Insulation resistance	1000 MOhm at 500 V DC
Local signalling	LED green input status
Minimum switching voltage	4 V DC turn-on
Maximum switching voltage	1 V DC turn-off
Input current limits	14...16.87 mA
Solid state output type	Zero voltage switching SCR output
Load current	0.15...6 A
Absolute maximum voltage	1200 V
Surge current	<= 715 A 16.6 ms <= 750 A 20 ms
Voltage drop	1.3 V on-state

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Motor power hp	0.16 hp at 104 °F (40 °C) 240 V AC
Maximum I ² t for fusing	2560 A ² .s 10 ms at 50 Hz half cycle 2330 A ² .s 8.33 ms at 60 Hz half cycle
Leakage current	<= 0.25 mA off-state
DV/Dt	500 V/μs off-state at maximum voltage
Response time	0.5 cycle turn-on 0.5 cycle turn-off
Cos phi	>= 0.5 with maximum load
Overvoltage category	III
Width	0.71 in (18 mm)
Height	90.3 mm
Depth	84.4 mm
Product weight	0.2 lb(US) (0.09 kg)
Device presentation	Complete product

Environment

Flame retardance	V0 conforming to UL 94
Dielectric strength	2.5 kV AC input/output 2.5 kV AC input or output to case
Pollution degree	2
Standards	IEC 60950-1 IEC 62314 IEC 61000
Product certifications	CSA REACH UL
Marking	CE
IP degree of protection	IP20
Ambient air temperature for operation	-22...176 °F (-30...80 °C)
Ambient air temperature for storage	-22...212 °F (-30...100 °C)


Ordering and shipping details

Category	22375 - INTERFACE MODULE(ABA,R,S)
Discount Schedule	CP2
GTIN	00785901978213
Nbr. of units in pkg.	1
Package weight(Lbs)	0.11
Returnability	N
Country of origin	MX


Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 1328 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold Reference not containing SVHC above the threshold
Product environmental profile	Available
Product end of life instructions	Available

Dimensions

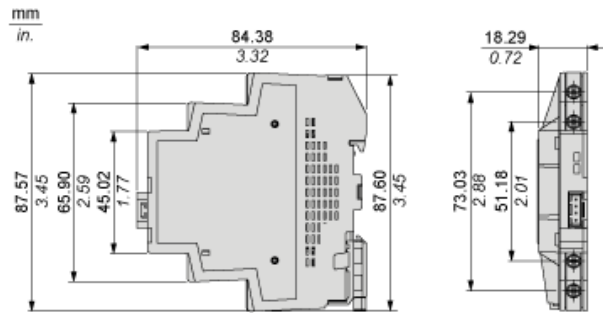

Derating Curves

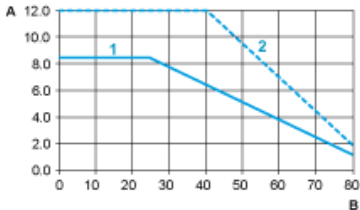

- A : Load Current (Amperes)
- B : Ambient Temperature (°C)
- 1 : Multiple units, no minimum spacing between components
- 2 : Installed single unit, distance to adjacent components more than 18 mm